■ 保管方法

- ○本製品を長期間使用せずに保管する場合は、なるべくゆるくたたみ、直射日光の当たらない風诵しの良い 場所に保管してください。付属の収納袋は、携行性を重視しているため、きつめにたたまないと入らない ので使用を避けてください。
- ○火のそばや暖房器具のそばなどの高温になる所に置かないでください。変形や損傷の原因になります。

■ 廃棄方法

○廃棄方法はお住まいの自治体の収集方法に従ってください。

■ アフターサービス

お買い求めいただきました本製品は万全を期して製造しておりますが、万一不備な点がございましたら、お買 い求めいただいた販売店、もしくは下記の弊社窓口までご連絡ください。

製造上の欠陥による不具合の場合は無償で交換させていただきます。なお、修理、交換等の要否につきまし ては、弊社の裁量にて判断させていただきます。

なお、以下のような原因での破損、不良につきましては保証いたしませんのでご了承ください。

- ○本製品の誤った使用方法によるもの
- ○間違ったお手入れ、保管方法、経年変化による素材劣化
- ○乱暴な取り扱いによるもの
- ○その他、製造上の欠陥以外の原因によるもの

破損時は弊社にて診断をして、修理が可能な場合はご要望により有償にて修理させていただきます。

■ オプション(別売)

本製品は下記の別売のオプションを利用することができます。

- ムーンライト®テント 4 グラウンドシート※1 本体フロア生地の耐久性を高めるシートです。
- ムーンライト®4テントマット※1

適度なクッション性を持ち、地面の冷えを遮る中敷き用マットで す。

■ ムーンライト® オプショナルロフト

天井部分のスペースを有効利用するためのネッ トです。

メッシュアンカー

付属のペグが使用できない河原やガレ場でのテン トの固定に使用します。


※1:2019年以前製造のモデルには対応しません。

■ 仕様

○寸法

※図中の単位はcmです。

#1122687 ムーンライト®テント4



素材

- ○キャノピー: 20 デニール・ポリエステル・リップストップ [通気撥水加工]
- ○フロア:40デニール・ポリエステル・リップストップ 「耐水圧 2.000 mmウレタン・コーティング]
- ○レインフライ:20デニール・ポリエステル・リップストップ 「耐水圧1.500 mmウレタン・コーティング]
- ○ポール:アルミニウム合金

■ その他

本製品の仕様、デザインは予告なく変更されることがあります。また、重量などのスペックには誤差が生じる場合があります。

株式会社 モンベル 本社 〒550-0013 大阪市西区新町2-2-2 Tel. 06-6531-3544 フリーコール: № 0088-22-0031 モンベルホームページ http://www.montbell.ip 商品についてのお問い合わせはカスタマー・サービスまで 6

44-3855-2001

mont-bell

取扱説明書

ムーンライト®テント4

Moonliaht Tent 4

この度はお買いあげいただき、誠にありがとうございます。この取扱説明書(以下「本説明書」といいます)は 本製品の正しい取扱方法を説明しています。ご使用の前に本説明書をよくお読みいただき、正しい使用方法 をご確認ください。


なお、ご不明な点等ございましたら、販売店もしくは(株) モンベル カスタマー・サービスまでお問い合わせく ださい。本説明書は大切に保管してください。

■ 特長

本製品は、快適なキャンプ、ベースキャンプをテーマに開発された吊り下げ式テントです。

名前の通り、月明かりの下でも簡単に素早く設営でき、雨の多い日本の気候に最適な優れた防水性と通気 性を誇ります。

▮各部の名称

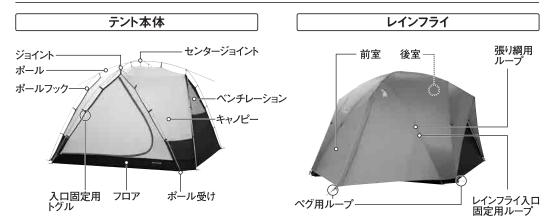









ペグ:18本

ポール応急補修用 パイプ 1本

■ 安全上の注意 必ずお読みください

危険 人が死亡または重傷を負う危険が差し迫って生じることが想定される内容です。


- ○本製品内や本製品の近くでは、絶対に火気を使用しないでください。火災や一酸化炭素中毒の恐れがあります。
- ○出入り口やベンチレーターを常に開け、換気に充分ご注意ください。
- ○台風、落雷、強風、豪雨、大雪などの厳しい自然条件の際は、キャンプ場の管理担当者の指示に従い安 全な場所に避難してください。 1

○河原や河川付近に設営する際は気象条件により突然増水することがあります。設営場所は特に注意してください。

巻 場合により人が死亡または重傷を負う可能性が想定される内容です。 軽傷または物的損害が発生する頻度が高いことが想定される内容です。

- ○本製品を設営される際は、周囲の環境や気象条件などを充分考慮し、安全を確認してください。
- ○出入口は風下側を選び設営してください。強風で本製品が飛ぶ恐れがあります。
- ○本製品の改造や分解などは絶対にしないでください。性能が損なわれ、充分に保護能力が発揮できない恐 れがあります。
- ○使用前は毎回必ず点検をしてください。老朽化が認められる場合や損傷が認められたり、疑わしい場合は 直ちに本製品の使用を中止してください。本来の性能が発揮できない恐れがあります。
- ○正しいお手入れ方法、保管方法を守ってください。誤ったお手入れや保管方法を行うと、本来の性能を発 揮できない恐れがあります。

- ○稜線上や大木の近く、広い草原では落雷に注意してください。
- ○キャンプ場やキャンプ許可地以外では使用しないでください。
- ○設営地はできるだけ平坦で、危険のない場所を選んでください。
- ○使用の際は必ずペグと張り綱で固定してください。砂地や雪上では付属のペグが使用できない場合があり ます。あらかじめ設営する場所の地面の状態を確認してください。
- ○本製品は太陽光線の紫外線により牛地が劣化します。また、硫黄ガスが発生する温泉地等でも寿命を縮 めますのでご注意ください。
- ○各パーツや付属のペグには鋭利な部分があります。取扱いにご注意ください。
- ○ポールを伸ばす際は周囲に十分に注意してください。近くに人がいないことを確認してください。
- ○ポールをテント本体に取り付ける際はポールの跳ね返りに注意してください。
- ○小さいお子さまにポールの組立てや、ペグ打ちの作業をさせないでください。
- ○本製品のレインフライの牛地には防水加工が施されています。外気との温度差が大きいと、結露によって 牛地の内側の壁面に水滴がつくことがあります。これは水漏れではありません。本製品の換気を行うことで 改善することができます。
- ○ポールを組み立てる際は、奥まで差し込んでください。奥まで 差し込まないとポールが破損する恐れがあります。また、指を 挟まないようにしてください。
- ○ショックコードを必要以上に伸ばさないでください。ポールが跳 ね返った際、衝撃でポール先端が破損する恐れがあります (右図参照)。
- ○濡れたままで長時間他のものや各パーツを一緒に置いて おくと色が移る恐れがあります。



■ 使用前の点検

□ポールに亀裂などの破損がないか |生地に破れがないか

■ 使用方法


○ 組み立て方法


新しいテントに慣れるため、実際にフィールドへ出かける前に、必ず試し張りを行ってください。

1.テント本体の組み立て


●サント本体を設営地に広げ、強風時は風でテントが飛ばされないようペグで仮留めしてください。


- ②ポールは、中に通っているショックコード 通りにポールをつなぎ合わせる(図A) と自然に組み上がります。ジョイントへの ポールの接続は(図B) のように行いま す。ポールがジョイントに確実に入って いることを確認してください。
- ※ショックコードを必要以上に伸ばさないように 注意してください。
- ❸センタージョイントパーツの付いたポール セットをテントの上に置きます(図C)。
- ●ポールの先端を図の4か所のポール受 けに美し込みます(図D)。
- **⑤**○リングの付いたポールセットを**③**の ポールセットの上に乗せ、センタージョイ ントパーツに取り付けます(図 E)。少し 硬いので、下から押さえながらパチンと 音がするまでレバーを押し込みます。
- 6ポールの先端を図の4か所のポール受 けに差し込みます(図F)。
- **⑦**テント本体中心のフックをセンタージョイ ントパーツの下部にスライドさせて取り 付けます (図 G)。
- ❸テント本体上部の前後左右のフックを ポールのジョイント(4ヶ所)の下部にス ライドさせて取り付けます (図 H)。
































2

⑨テント本体の残りのフックをすべてポールにかけます(図 I)。




- ●テント本体の各コーナーに設けられたペグ用ループをペグで留めます(図J)。 ※ペグで留める際は、ペグをこれ以上打ち込めない深さまで、打ち込んでください。
- ※付属のペグが使用できないガレ場や雪面では別売のメッシュアンカーなどを 用いて固定してください。
- ※フロアの防水性向上や保護のために別売りのグラウンドシートもご利用いただけます。(P⑥ 参照)




2.レインフライの取り付け -


●テント本体とレインフライの入り口の位置を合わせます。レインフライ内側のエンドキャップをポールエンド(上部)に取り付けていき(4ヶ所)、レインフライをかぶせます。一人で設営するときは、隣り合うエンドキャップを順に取り付けて行くことで、レインフライをかけやすくなります(図K)。



②張り綱用ループの内側にあるベルクロでレインフライとポールを固定します(8ヶ所)(図L)。




③レインフライ裾のフック(8カ所)をテントコーナーのゴムループにかけます(図M)。 ゴムループに付属しているテープループを利用すると効率良く作業ができます。



3.テントの固定

張り綱は風が吹くことを想定して必ず取り付けてください。レインフライ8カ所の張り綱をペグで固定します(図N)。付属の張り綱はランナー(自在金具)がついており、ランナーを通したループをペグにかけて長さを調節します(図O)。レインフライ裾部のペグ用ループについてもペグで固定します。なお、このテントにハンマーは付属していません。


※ペグで留める際は、ペグをこれ以上打ち込めない深さまで打ち込んでください。





○ 収納方法

- ●ペグを抜きます。
- ②レインフライを外します。
- ❸テント本体のフックをポールから外してください。
- ④ポールの先端をポール受けから外します。その際ポールが跳ね返ると危険ですので、ポールが伸びきるまで手を離さないでください。
- ⑤ジョイントからポールを抜き、ポールの真ん中から折りたたむようにします(図P)。こうすることにより、ショックコード全体に均一にテンションがかかり、ショックコードの寿命を伸ばすことができます。
- ⑤テント本体とレインフライを収納袋の幅に合わせて畳み収納します。 その際、ペグは必ずペグ用収納袋に入れてください。そのまま収納すると本体生地を傷つけることがあります。




※図はイメージです。テントによって継ぎ数は異なります。

○破損時の対応

1.ポール -

テント設営時に強風や豪雪などの理由で本製品のポールが万一破損した際は、右図の通り応急処置をしてください。副木を添えて応急処置をすることもできますが、本製品の付属品であるポール応急補修用パイプを用い応急処置も可能です。



2.テント本体

生地の破損についてはリペアシート(別売)をご用意しております。

※使用後は修理を依頼してください。 販売店もしくは (株) モンベル カスタマー・サービスにお問い合わせください。

■ **お手入れ方法** 間違ったお手入れ方法や保管方法は本製品の寿命を縮めます。 使用後や保管時は以下の点を参考にしてください。

- ○使用後は、泥汚れなどをあらかじめ水洗いし、陰干しして乾燥後に収納してください。汚れたまま、あるいは 濡れたまま長時間放置するとカビの発生する可能性があり、また生地も劣化しやすくなります。
- ○長期の使用により、レインフライやフロアなどの撥水性能 (水を弾く力) が低下した場合は別売のS.R.スプレー等の撥水スプレーをご使用ください。
- ○ドライクリーニングや洗濯機による洗濯はできません。生地を傷める恐れがあります。
- ○ジッパーの動きが固くなりましたら、別売りのスムースライダー™やローソクのロウを塗ると回復します。
- ○ポールやペグは汚れを濡れタオルで拭き取った後、機械油を薄く塗っておきます。ポールは接合部にのみ、 塗布します。

5

■ Storage

When storing for an extended period of time, store loosely in a well ventilated, cool, dry place out of direct sunlight. Tents are not designed to be stored long term in their stuff sacks that should only be used for transporting the tent.

To prevent deforming and damage to the tent, do not store near heat sources.

Disposal

OPlease follow local regulations regarding waste disposal.

■ Warranty

Montbell's warranty covers all defects in materials and workmanship to the original owner, for the lifetime of the product. Its a product ever fails due to a manufacturing defect, Montbell will repair or replace the product at its discretion. This warranty does not cover damage(s) caused by accident, improper care, negligence, misuse, alterations or normal wear and tear. Damage(s) not covered under warranty will be repaired at a reasonable rate. If you would like to make a warranty inquiry, please contact Montbell Customer Service or the store of original purchase.

■ Accessories (Sold separately)

The following accessories are available for use with this tent.

Moonlight Tent 4 Foot Print *1

Foot print for protecting tent floor.

Moonlight Tent 4 Tent Mat *1

A mat with an appropriate amount of cushioning and **Mesh Anchor** for preventing loss of heat through the ground.

*1 Not compatible with models before 2019.

Moonlight Tent Optional Loft


This storage net can transform your tent's ceiling space into a useful storage area.

An anchor for use in rocky terrain.

Specifications

Dimensions

#1122687 Moonlight Tent 4



*Units are in centimeters.

Maximum Height: 180 Interior Height: 170

) Materials

- Canopy: 20-denier rip-stop polyester (water repellent treatment)
- **Floor:** 40-denier rip-stop polyester (urethane coating, water pressure resistant to 2,000mm)
- Rainfly: 20-denier rip-stop polyester (urethane coating, water pressure resistant to 1,500mm)
- Poles: aluminum alloy with internal shock cord and socket

All product specifications and design are subject to change without prior notice. Actual product specifications may vary.

mont-bell Co.,Ltd.

2-2-2 Shinmachi, Nishi-ku, Osaka 550-0013 JAPAN www.montbell.com 6

44-3855-2001

mont-bell

User's Manual

Moonlight Tent 4

Moonlight Tent 4


Thank you for purchasing this product. Before using, please carefully read this manual for instructions on the proper care and usage of this product,

If you have any questions regarding this product, please contact Montbell Customer Service or the store of original purchase. Keep this manual for future reference.

Description

As the name suggests, this tent is easily and quickly set up even under the light of the moon. Made for dealing with the wet and hot climate of Japanese summers, the Moonlight tent has a high degree of waterproofing. The Moonlight tent series have long been used and appreciated by backpackers, family campers, kayakers, and motorcyclists.

Components

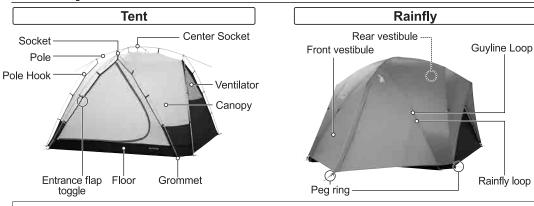

Carrying case

User's manual

Rainfly

8x Guvline

■ Safety Warnings! Please read carefully.



Tent

Under certain conditions, use of this product can result in major injury or death.

2x Pole set

Stuff sack for poles

18x Pegs

Stuff sack for pegs

1x Pole


Repair Sleeve

- ONEVER place a flame source in or near your tent, tarp, or shelter. Injury or death by fire and/or carbon monoxide poisoning is possible.
- Oventilate the tent, tarp, or shelter at all times by keeping ventilators or tent door(s) open.
- Follow campsite instructions for evacuation and safety procedures when encountering harsh weather conditions such as typhoons, lightning, strong winds, heavy rain or snow.

When selecting a campsite near rivers or river beds please take into consideration weather conditions can cause rivers to flood suddenly.	
WARNINGS!	Under certain conditions, use of this product can result in injury, death, or property damage.
OWhen selecting a campsite conditions.	, check the safety of the surrounding area and be aware of weather
OWhen selecting a campsite, be blown away by strong win	place the entrance of the product downwind. Be aware this product can
	product. Improper modifications and alterations can damage the product
OPrior to use, check the prod tion from age/use, damage of	uct's condition and stop using immediately if you notice any deteriora- or irregularities.
OPlease follow recommended decrease in performance.	I care and storage instructions. Improper care and storage can lead to
CAUTION!	nder certain conditions, use of this product can result in injury r property damage.
 Be careful of lightning in the mountains, when close to trees or in open fields. Only pitch tents, tarps, or shelters in areas designated for camping. Choose a campsite free of danger and as level as possible. Use pegs and guylines to stake your tent, tarp, or shelter at all times. Pegs may not be suitable for all ground conditions, such as sand or snow. Before pitching the tent, check ground conditions to see if staking pegs is possible. Ultraviolet rays from the sun can damage the product fabric. Sulfur gas from natural hot springs can also shorten the product's lifespan. Be careful when handling pegs or parts included with the product as they can have sharp edges. When assembling the pole, make sure the area is clear and be careful of other people in the area. When attaching poles to the tent, tarp, or shelter, be careful of recoil. Do NOT allow children to assemble the pole or stake pegs. The rainfly has a waterproof urethane coating. Depending on the difference in temperature and humidity, water may condense on the inside of the rainfly. This does not mean the rainfly is leaking. Condensation can be prevented with adequate ventilation. When assembling the pole, make sure all sections are fully inserted and be careful of pinching your fingers in between pole sections. Shock cord Pull 	
Recoil can damage poles a right.	as seen in the figure to the
Ocolors can transfer when all period of time while wet.	lowed to sit for an extended 3 Clang ← Pole damage
■ Prior to use, inspect this product for:	
\square Cracks or damage to poles. \square Tears or damage to fabric and rainfly.	
■ Directions	
 Setting up the Telegraph Before using the product and its feat 1.Pitching the Ter 	ct for the first time, practice pitching at home to familiarize yourself with ures.


②Assemble the poles (Fig. A). Connect the poles to the socket (Fig. B). Place well-assembled poles on the spread tent..

*Do NOT pull the shock cord more than necessary.



Position the pole set with the center joint part so it is directly above the tent(Fig. C).


Insert the pole ends into the grommets (Fig. D).





6Insert the pole ends into the grommets (Fig. F).


Slide the part on the top of the tent to the bottom of the center join part (Fig. G).

Slide the parts on the sides of the tent onto the sockets (Fig. H).











2

1 Spread the tent on the ground. If there are strong winds, temporarily stake the tent with pegs.

Attach the rest of hooks to the poles (Fig. I).




- **O**Stake each corner of the tent using the peg loops (Fig. J).
- *Stake pegs as deep as possible.
- *When staking a tent in rocky or snowy conditions, consider using a mesh anchor or snow anchor (sold separately).
- *To protect the tent floor and improve water resistance, consider using a foot print (sold separately, see p. 6)




2.Attaching the Rainfly


Secure the rainfly by attaching the end caps to the front and rear pole ends (Fig. K). If pitching the tent by yourself, start at one end cap and proceed around in a circle.



Attach the rainfly to the poles using the Velcro (Fig. L).



One of the tent. Using the pull tabs will help hooking (Fig. M).





3.Staking the Tent

Always secure the tent with guylines. Fix the guylines to the guyline loops on the corners of the rainfly (Fig. N). Use the runners to tension the guylines to staked pegs (Fig. O). Stake the bottom of the rainfly with pegs. Please note that a hammer for staking pegs is not included in this tent.

4


*Stake pegs as deep as possible.





○ Taking Down the Tent

- **1**Pull the pegs out of the ground.
- **2**Remove the rainfly.
- **3**Unhook the rainfly from the pole ends.
- ◆ Take the pole ends out of the grommets. Firmly hold the poles until the poles are no longer at tension as there is a risk of injury due to recoil.
- **⑤**Pull the poles out of the sockets and take apart the poles starting in the middle (see Fig. P). This extends the life of the shock cord by placing an equal amount of tension over the entire length of the cord.
- •Fold the tent and rainfly into the same width as the stuff sack for easier storage. To prevent damaging the tent's fabric, store pegs and poles separately in their own stuff sack.




*Illustration. Actual tent pole length, shape and number of sections may vary.

Emergency Repair –

1.Pole -

In case strong wind or heavy snow breaks a pole, temporarily fix the pole as shown on the right. Although it is possible to use a splint to do the job, we recommend using the Pole Repair Sleeve that is included in this product.



Slide the Pole Repair Sleeve over the area that has been damaged. To prevent the Pole Repair Sleeve from moving, fix it in place using tape.

2.Tent

If the tent fabric is damaged or tears, temporarily apply the Repair Sheet (sold separately). *Afterwards, contact the store where the tent was originally purchased or Montbell Customer Service for information on permanent repair.

Care

Improper care and storage can shorten the lifespan of this product. To extend the lifespan of this product, please follow the recommendations below.

- OWash away stains and soiling with water. Avoid direct sunlight and allow to air dry in a cool well ventilated area. If stored wet or soiled, mold can grow and the fabric can start to prematurely deteriorate.
- Over time the product's water repellent treatment will deteriorate. To restore the product's water repellent abilities, reapply a water repellent spray (sold separately).
- ODO NOT dry clean or wash in washing machine. This can damage the product's fabric.
- Olf zipper movement becomes stiff, use the Smooslider (sold separately) or candle wax to restore functionality.
- Ouse a damp cloth to clean pole and pegs. Afterwards apply a silicone lubricant. For poles, only lubricate the joints.