

mont·bell

取扱説明書

ロガーヘルメット フェイスガード

Logger Helmet Face Guard

重要

本製品はフェイスガードのみです。

ロガーヘルメットに接続するには別売のイヤーマフか、アタッチメントが必要です。

この度はお買いあげいただき、誠にありがとうございます。この取扱説明書（以下「本説明書」といいます）は本製品の正しい取扱方法を説明しています。ご使用前に本説明書をよくお読みいただき、正しい使用方法をご確認ください。

ただし、本説明書は本製品の基本的な使用方法を示すものでありチェーンソーを使用する際の安全システム全体を解説するものではありません。安全な条件のもとで十分な練習を行い、正しい使用方法を習得してください。なお、ご不明な点等ございましたら、販売店もしくは（株）モンベル カスタマー・サービスまでお問い合わせください。本説明書は大切に保管してください。


■ 特長

本製品は、チェーンソーを使用する作業時に飛散する木片や小石などの飛来物から顔を守るフェイスガードです。メッシュにより曇らずに快適に作業できます。使用しない時はメッシュガードを跳ね上げることができます。

※個人用の目、顔面保護具に対する国際規格 (ISO16321:2021) に適合しています。

※眼・顔面保護具の試験方法に関する国際規格 (ISO18526-4:2020) における頭部形状1-Mに適合しています。

■ 各部の名称

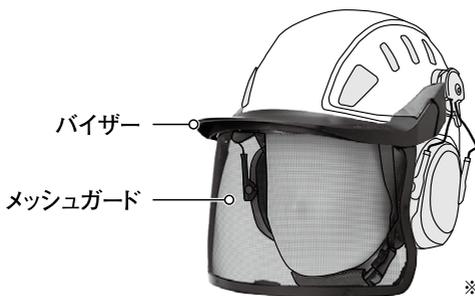

※写真はイメージです。

■ 安全上の注意

必ずお読みください

警告 場合により人が死亡または重傷を負う可能性が想定される内容です。
軽傷または物的損害が発生する頻度が高いことが想定される内容です。

- 本製品は飛来物や、まぶしさから一定の保護をするためのものです。チェーンソー作業以外の用途で使用しないでください。
- 本製品にフィルター作用はありません。物理的な衝撃、化学薬品や液体の飛散、目に障害を与えるような強い紫外線や赤外線、熔融金属の飛散、高温の固体、または電氣的危険から目を守る目的で使用しないでください。そのような環境、作業の場合は側面保護性能のあるスペクタクル形保護メガネやゴーグル形保護メガネを合わせて使用し、法令等にしたがって選択、使用してください。
- 使用前に毎回必ず点検してください。老朽化が認められる場合や損傷が認められたり、疑わしい場合は直ちに本製品の使用を中止してください。本来の性能が発揮できない恐れがあります。
- 本製品が低温（-5℃以下）や高温（55℃以上）となった状態では本来の性能が発揮できない恐れがあります。

注意 人が傷害を負ったり物的損害の発生が想定される内容です。

- 暖房器具など高温になるところに近づけたり、車中などには放置しないでください。変質、変形する恐れがあります。
- シンナーやアルコール等の有機系溶剤は変形・変色の原因となりますので使用しないでください。
- 正しいお手入れ方法、保管方法を守ってください。誤ったお手入れや保管方法を行うと、本来の性能を発揮できない恐れがあります。
- 本製品の改造や分解などは絶対にしないでください。性能が損なわれ、十分に機能が発揮できない恐れがあります。
- メッシュガードに穴が開いたり、傷がついたりすると、保護機能が大幅に低下するため、すぐに交換してください。また、各 부품の交換が必要な際は、弊社カスタマーサービスへご相談ください。
- 着用者の皮膚に接触する部分にアレルギー反応やかぶれが生じた際は、直ちに使用をやめ、医師に相談してください。


使用前の点検 使用にあたっては、毎回必ず次のことを確かめてください。
異常が見られた場合は使用しないでください。

- 亀裂や変形などがいないか
- メッシュガードに破れがないか
- 各部品が外れていないか


使用方法

① 組み立て方


- ①メッシュガードの縁をバイザー中央のツメの内側に合わせて、メッシュガード中央の穴をバイザー中央の突起に差し込みます。

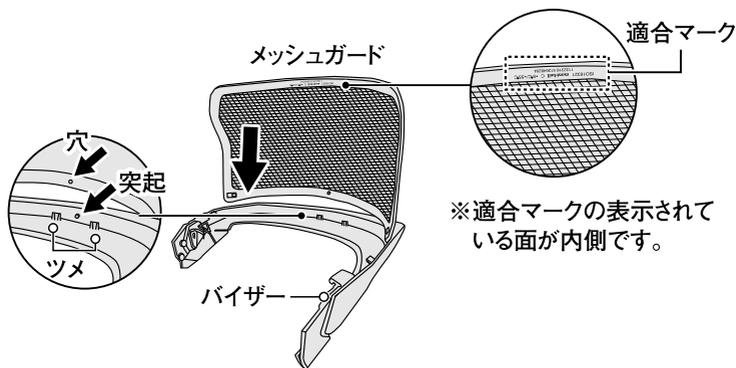


- ②メッシュガードの左右両端の穴をバイザーの左右の突起に差し込みます。間のツメにも縁が確実に入っているか確認してください。

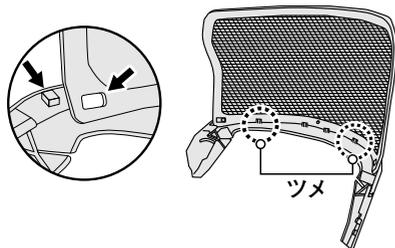

- ③バイザーの端にある突起を、イヤーマフもしくはアタッチメント(別売)の接続部の2つの穴に取り付けます。
反対側の接続部にも同様に取り付けます。
※イヤーマフに左右の違いはありません。

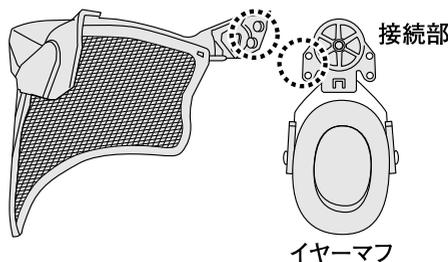

- ④ イヤーマフの接続部をロガーヘルメット(別売)のスロットに差し込みます。
バイザーの両端の返しをヘルメットの縁に引っ掛けて固定してください(図1)。

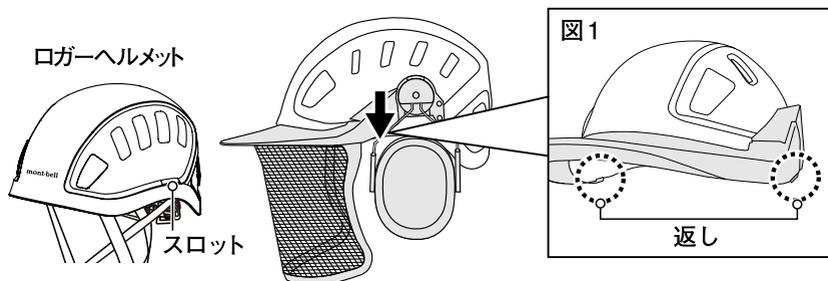

イヤーマフを使用せずにロガーヘルメットに直接接続するには別売のアタッチメントを使用し、上記の③、④の手順でロガーヘルメットに取り付けます。



■ 耐用年数

- 本製品の強度は時間の経過によって低下します。通常のご使用、お手入れ、保管をされた場合で最初の使用から5年間までの使用をおすすめします。使用状況によりさらに短くなる可能性があるため、早めに買い替えてください。また、次の要因はさらに本製品の劣化を早めます。
 - ・ 化学薬品との接触・高温下での使用・長期間の紫外線の曝露・摩滅・切断など・不適切な保管方法またはお手入れ方法

■ お手入れ方法

間違ったお手入れ方法や保管方法は本製品の寿命を縮めます。
使用後や保管時は以下の点を参考にしてください。

- 使用後は直射日光を避け自然乾燥させてください。
- 本製品が汚れた際は水かぬるま湯で洗ってください。汚れがひどい時は柔らかいスポンジか布に中性洗剤を使用し汚れを落としてください。55℃以上の熱湯やガソリン、シンナー、ベンジン等の溶剤、研磨剤入りのクリーニング剤や漂白剤などは絶対に使用しないでください。

■ 保管方法

- 直射日光、紫外線の当たらない風通しのよい涼しい場所で保管してください。
- 直射日光に曝される車の中や火のそばなど高温となる場所に本製品を放置しないでください。
- 保管時および運搬時には、本製品の上に物を載せたり荷重しないでください。また化学薬品類や刃物や鋭利な物と接触させないでください。

■ 廃棄方法

- 廃棄方法はお客様の自治体の収集方法に従ってください。

■ アフターサービス

お問い合わせいただきました本製品は万全を期して製造しておりますが、万一不備な点がございましたら、お問い合わせいただいた販売店、もしくは下記の弊社窓口までご連絡ください。

製造上の欠陥による不具合の場合は無償で交換させていただきます。なお、修理、交換等の要否につきましては、弊社の裁量にて判断させていただきます。


なお、以下のような原因での破損、不良につきましては保証いたしませんのでご了承ください。

- 本製品の誤った使用方法によるもの
- 間違ったお手入れ、保管方法、経年変化による素材劣化
- 乱暴な取り扱いによるもの
- その他、製造上の欠陥以外の原因によるもの

破損時は弊社にて診断をして、修理が可能な場合はご要望により有償にて修理をさせていただきます。

■ 仕様

品番: 1132316
品名: ロガー ヘルメット フェイスガード
認証: ISO 16321
表示: メッシュガード内側、バイザーに表示

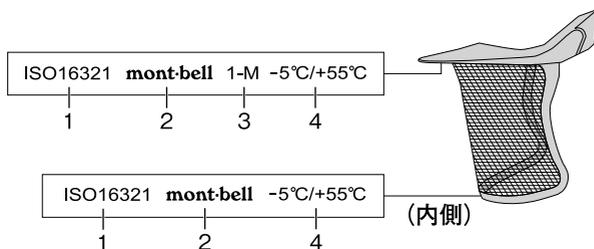

1. 個人用の目、顔面保護具に対する国際規格
2. 製造元トレードマーク
3. 眼・顔面保護具の試験方法に関する国際規格 (ISO18526-4:2020) における頭部形状:1-M
4. 規格に適合している温度範囲:-5°C~55°C

別売オプション

- #1132314 ロガーヘルメット イヤーマフ
- #1132317 ロガーヘルメット フェイスガード用 アタッチメント

■ その他

本製品の仕様、デザインは予告なく変更されることがあります。また、重量などのスペックには誤差が生じる場合があります。

mont-bell

User's Manual

Logger Helmet Face Guard

Logger Helmet Face Guard

Attention

This product only includes the face guard. Use with the Logger Helmet requires designated earmuffs or attachments (sold separately).

Thank you for purchasing this product. Before using, please carefully read this manual for instructions on the proper care and usage of this product.

This manual covers only the basic use of this product. It does not provide a comprehensive explanation of the safety system for the use of chainsaws. Practice and learn, under safe conditions, proper techniques and safety procedures for using this product. If you have any questions regarding this product, please contact Montbell Customer Service or the store of original purchase. Keep this manual for future reference.

Description

Designed to protect your face from woodchips, pebbles, or other flying debris when working with a chainsaw. Utilizes a mesh material for fog-free visibility and comfort. The mesh guard can be flipped up as needed.

*Conforms to the International Standard for Eye and Face Protection (ISO 16321:2021).

*Conforms to Headform 1-M in accordance with the International Standard for Test Methods for Eye and Facial Protection (ISO 18526-4:2020).

Components



*Illustration. Actual product may vary.

Safety Warnings

Please read carefully.

WARNING! Under certain conditions, use of this product can result in injury, death, or property damage.

- This product provides a certain level of protection against flying debris and glare. Do NOT use this product for any purpose other than chainsaw work.
- This product does NOT have a filter function. Do NOT use it to protect eyes from: physical impact, chemical/liquid splashes, harmful UV/infrared rays, molten metal debris, high-temperature objects, or electrical hazards. In such environments or work conditions, use this product together with spectacles- or goggle-type protective eyewear that provides side protection. Select and use appropriate equipment in accordance with applicable laws and regulations.
- Prior to each use, check the product's condition and stop using immediately if you notice any deterioration from age/use, damage or irregularities. May negatively affect the performance of the product.
- Use in extreme temperatures (below -5°C or above 55°C) may negatively affect the performance of the product.

CAUTION! Under certain conditions, use of this product can result in injury or property damage.

- Do NOT store in places subject to temperature extremes, such as near a heater or in a car. May cause deterioration and deformation.
- Do NOT use paint thinner, alcohol or other organic solvents. May cause deformation or discoloration.
- Follow the recommended care and storage instructions. Improper care and storage can lead to decrease in performance.
- NEVER modify or alter this product. Improper modifications and alterations can damage the product and impair functionality.
- Replace if punctures or scratches are found. Will greatly reduce the protective function. If any parts need replacement, contact Montbell Customer Service.
- If you experience an allergic reaction or rash where this product contacts the skin, STOP use immediately and consult a physician.

■ Prior to use, inspect this product for:


Stop using immediately if you notice any irregularities.

- Cracks and deformation
- All parts securely attached
- Tears in the mesh guard


■ Directions

○ Assembling the Face Guard

- ① Insert the mesh guard's edge between the rim and tabs on the visor, while fitting its central hole onto the visor's pin.

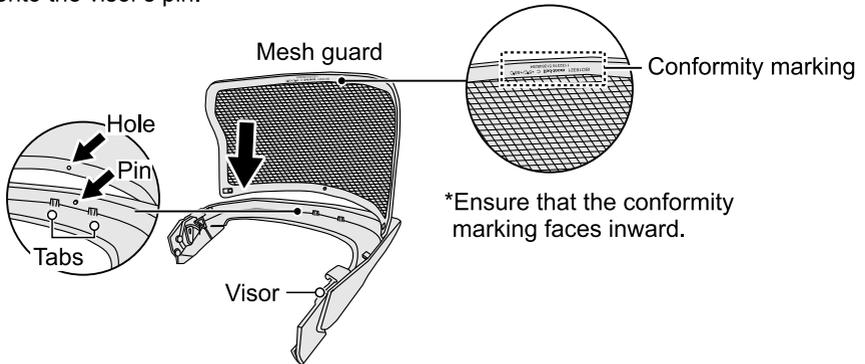


- ② Fit the mesh guard's left and right holes onto the corresponding pins on the visor. Ensure the edge is also secured with the halfway tabs.

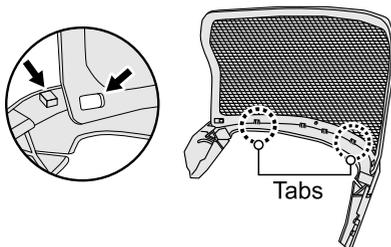


- ③ Connect the two pins at the visor end to the corresponding holes on the attachment of the Logger Helmet Earmuffs or Logger Helmet Face Guard Attachment (both sold separately). Repeat for the other end.

*The earmuffs have no left/right orientation.

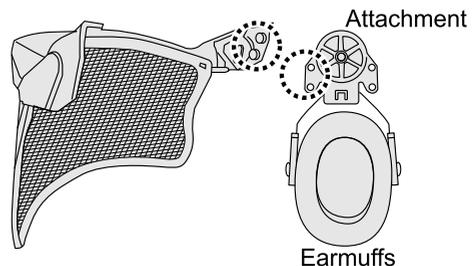

④ Insert the slide tab on the earmuff attachment into the slot on the Logger Helmet (sold separately).

Secure the visor to the helmet edge with the hooks at both ends (Fig 1).

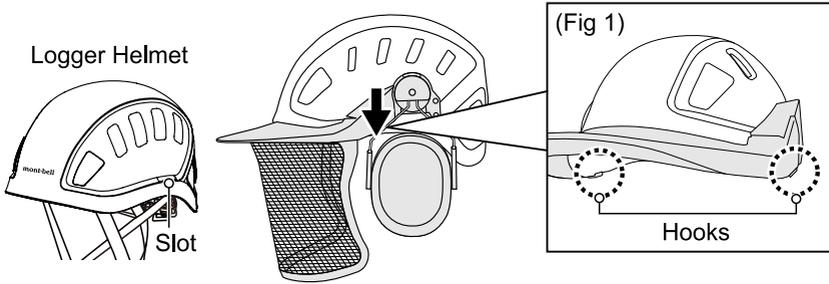

To connect directly to the Logger Helmet without earmuffs, use the Logger Helmet Face Guard Attachment (sold separately) and follow steps ③ and ④.



■ Lifespan

○ The performance of this product declines over time. When properly used, cared for, and stored, the replacement is recommended after 5 years from first use. However, the lifespan can vary depending on usage conditions, requiring earlier replacement. The following factors may accelerate deterioration:

Contact with chemicals/ Use in high temperatures/ Long-term exposure to ultraviolet rays/ Abrasion/ Cuts and severed parts/ Improper storage or care

■ Care **Improper care and storage can shorten the lifespan of this product. Follow the recommendations below to extend the lifespan of your product.**

- After use, air dry out of direct sunlight.
- If the product becomes dirty, clean it with water or lukewarm water. When heavily soiled, use a mild detergent on a soft sponge or cloth to remove the dirt. NEVER use hot water above 55°C, abrasive cleaners, bleach and solvents such as gasoline, thinner or benzine.

■ Storage

- Store in a cool, well-ventilated place away from direct sunlight and ultraviolet light.
- Do NOT leave this product in a place subject to temperatures extremes, such as in a car in direct sunlight or near a fire.
- Do NOT place items on the product or apply any load during storage or transportation. Keep this product away from chemicals, knives and other sharp objects.

■ Disposal


- Follow local rules and regulations for proper disposal.

■ Warranty

Montbell's warranty covers all defects in materials and workmanship to the original owner, for the lifetime of the product. If a product ever fails due to a manufacturing defect, Montbell will repair or replace the product at Montbell's discretion. This warranty does not cover damage(s) caused by accident, improper care, negligence, misuse, alterations or normal wear and tear. Damage(s) not covered under warranty will be repaired at a reasonable rate. If you would like to make a warranty inquiry, please contact Montbell Customer Service or the store of original purchase.

■ Specifications

Style# : 1132316
Name : Logger Helmet Face Guard
Certification : ISO 16321
Marking : Inside the mesh guard, on the visor

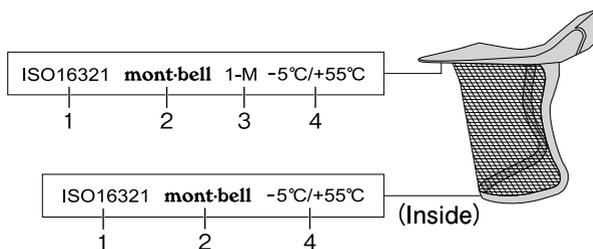

1. International Standard for Eye and Face Protection
2. Manufacturer identification
3. Headform 1-M in accordance with the International Standard for Test Methods for Eye and Facial Protection (ISO 18526-4:2020).
4. Temperature limits in accordance with the International Standard: -5°C to 55°C

Accessories (sold separately)

#1132314 Logger Helmet Earmuffs
#1132317 Logger Helmet Face Guard Attachment

All product specifications and design are subject to change without prior notice. Actual product specifications may vary.

mont-bell Co.,Ltd.

2-2-2 Shinmachi, Nishi-ku, Osaka 550-0013 JAPAN
<https://www.montbell.com/>